

Assigning a Dedicated, and Active Profile Overriding Ringtone for Emergency Notification

To ensure that any call or message sent from a designated emergency number will alert you, regardless of active profile settings (i.e. Silent), create a specific, audible profile that only responds to this number.



Step 1: If your displayed toolset is abbreviated, select the **Applications** icon to reveal all of the available tools.



Step 2: Select the **Profile** application to create a new emergency profile setting.




Step 3: Scroll down this screen to the **Advanced** option.






Step 4: Select **Advanced** to access all available profiles.

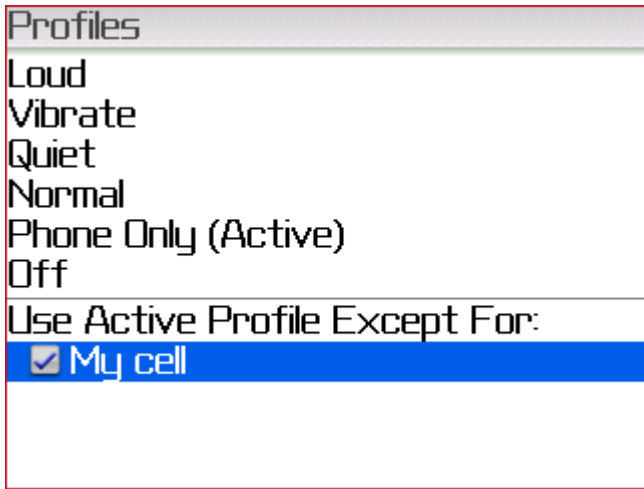

Step 5: Within the Profiles display, there will be an option to create exceptions to the active profile setting. In this example, an exception named *My cell* already exists. We will create another exception.

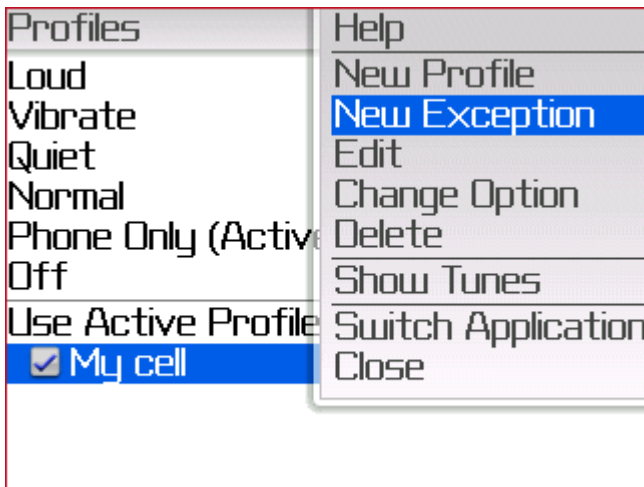

Step 6: Pressing your select button or wheel will call up a menu which includes the option to create a new exception. Select **New Exception**.



Exception: |

From:

Use Profile: Active Profile

Custom Phone Tune: Ringer_ClassicPhone

Step 7: Assign a name to this new exception. In this case I have named it MIR3.

Exception: MIR3 | Save

From: | Add Name

Use Profile: Switch Application

Custom Phone Close

Ringer_ClassicPhone

Step 8: Scrolling to the next field, assign a contact from your contact list. (The contact list usually originates from your Outlook contacts which is synchronized with the Blackberry. Contacts can also be added to this list via the Address Book tool on your Blackberry simply by selecting **New Address**. See Step 9 or Appendix A.) Press your select button or wheel to call up a menu which includes the option to add a name. Select this option.

Select Name: |

MICHEL *LITTEE

Michel Guay, Airplane mechanic

Michelle Smith, PCYC

Mike *Marcille

Mike Guay, Bombardier

MIR3-Emergency_Notification

Mr Calogero Lo Presti


Ms Gabrielle Dara Krim

Mylene Fortin, Le Vitrail


Natalie *Palfreeman

Step 9: Select the desired name from your contact list. In this case I have chosen MIR3-Emergency_Notification. This is an entry which I made into my Outlook contact list which contains the phone number to be used by the MIR3 system for notification. (514) 398-8700.




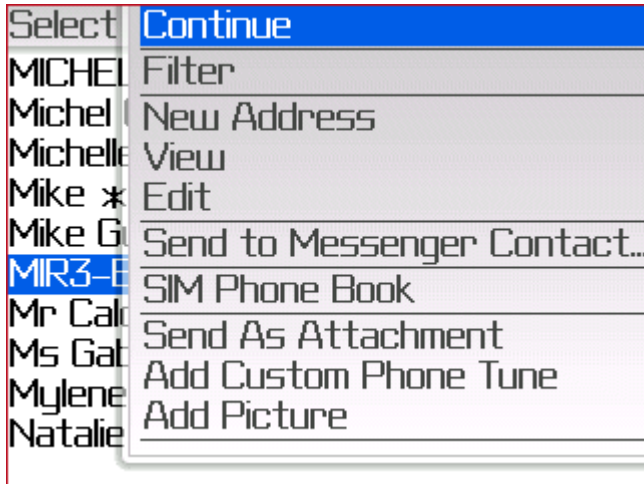

Step 10: Selecting the name will call up this menu. Select **Continue** to accept this choice.

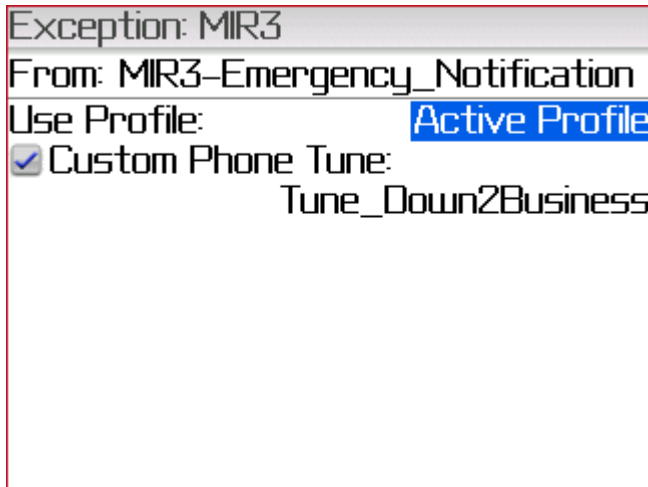


Step 11: Scroll to the next field and select the **Use Profile** option. In this case Active Profile was highlighted.

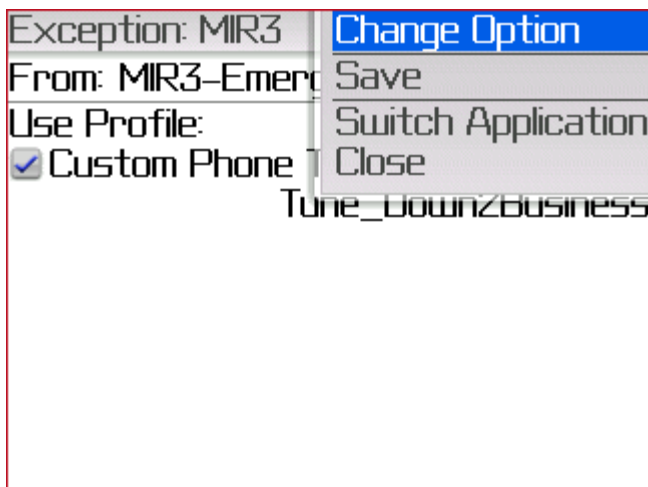


Step 12: Select **Change Option**. This will present the various available alert methods.




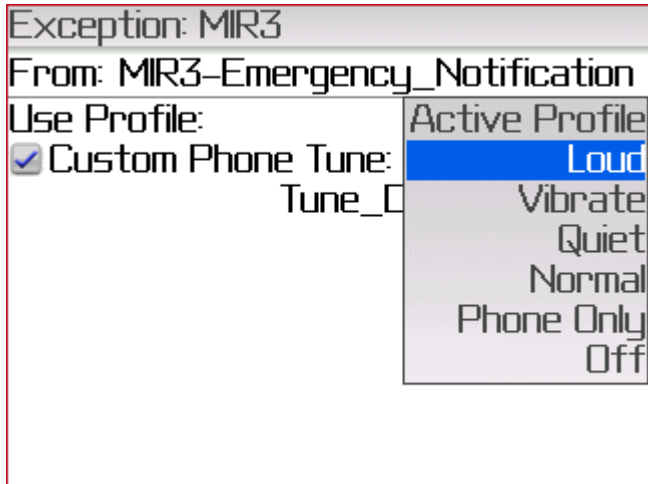

Step 13: Select a method that will most effectively alert you to an emergency message being issued from the designated source. In this case I have selected **Loud**.

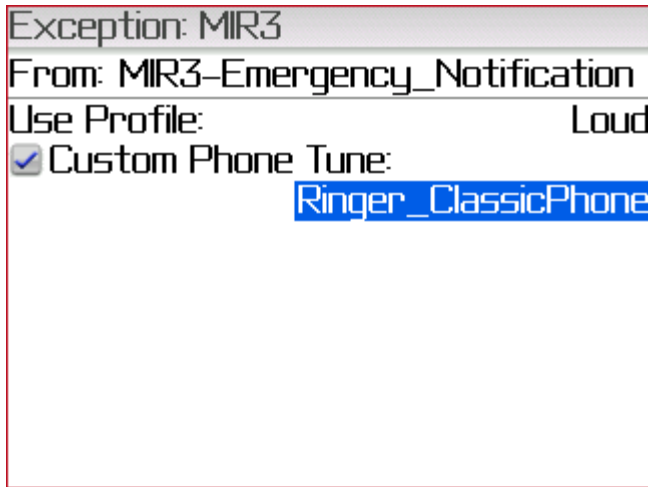


Step 14: Scroll to the ringer type and select the currently designated ringer tone.

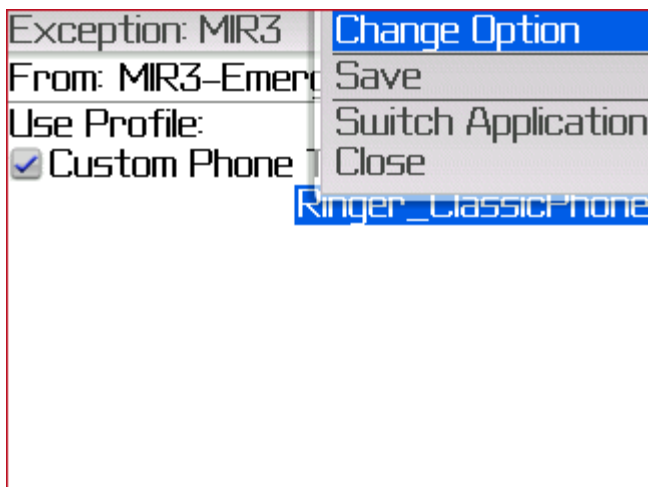



Step 15: Select **Change Option** from the menu to call up the available ring tones on your phone.



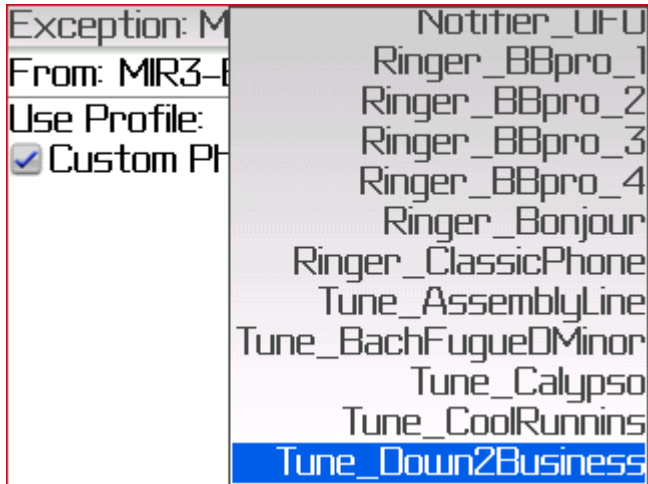

Step 16: Select an appropriate ring tone.

Note: It is advisable to select a ring tone that will attract your attention, and is clearly distinguishable from your regular ring tone.

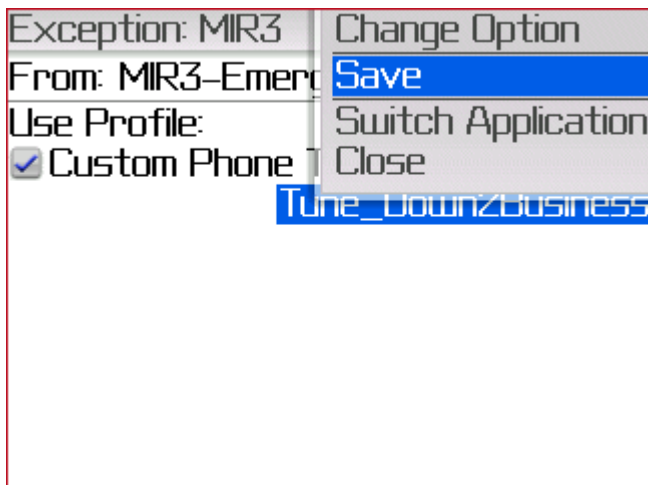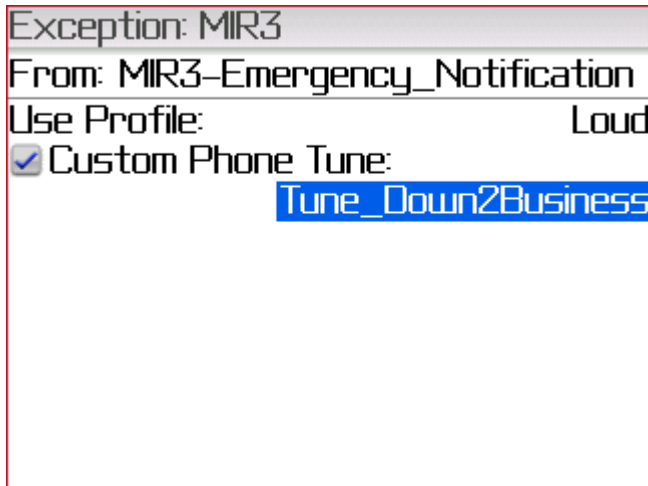

Step 17: If you are satisfied with your profile setting for this exception, press your select button or wheel to call the menu and select **Save**.



Profiles
Loud
Vibrate
Quiet
Normal
Phone Only (Active)
Off
Use Active Profile Except For:
<input checked="" type="checkbox"/> My cell
<input checked="" type="checkbox"/> MIR3


Completion: Your new exception will be recorded and active. Any time a message is issued from this emergency notification number, the settings in the exception profile will override the active profile. As an example, if you have changed the active profile to Off or Quiet while in a meeting, any calls issued from the MIR3 source would then alert you using the settings for that profile.




Appendix A : Manually adding a name to your Address Book (Contact List)



Step A1: Select the Address Book application.

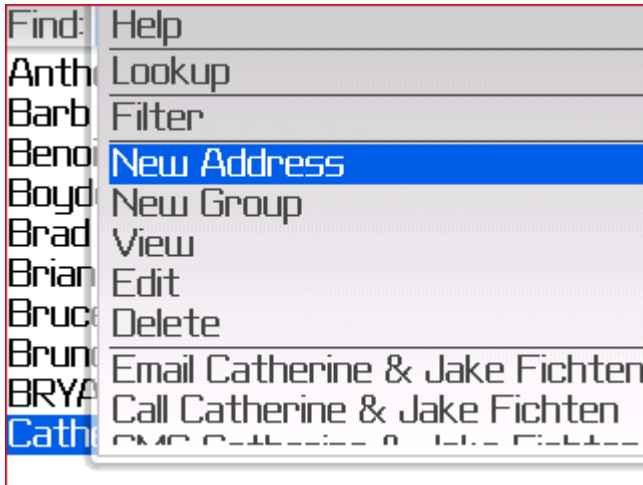

Step A2: Press your select button or wheel twice, then scroll to and select **New Address**. Add a name (e.g. MIR3-Emergency_Notification) and a phone number (e.g 514-398-8700).

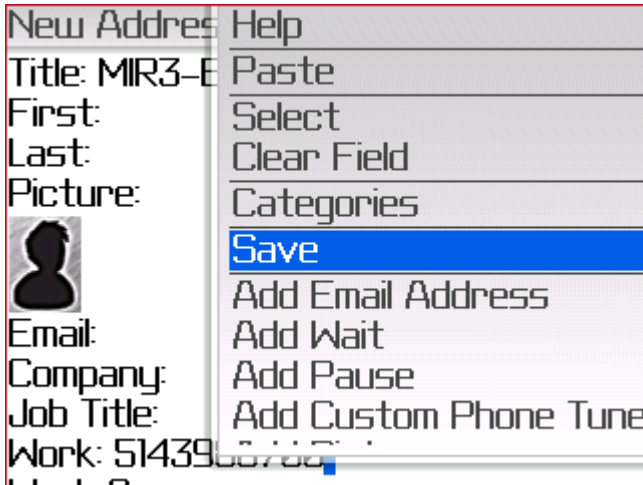

Step A3: Select **Save** and the phone number will be stored as a contact in your list.

